FRONT ELEVATION

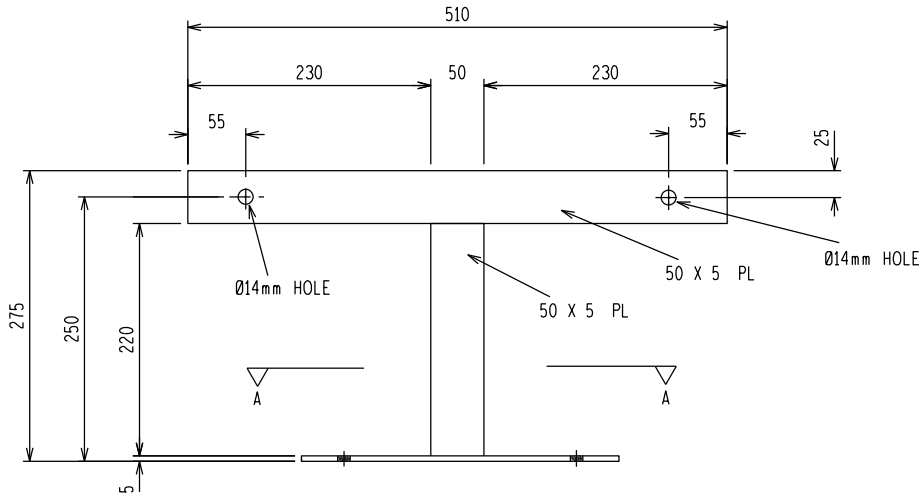

LEFT ELEVATION

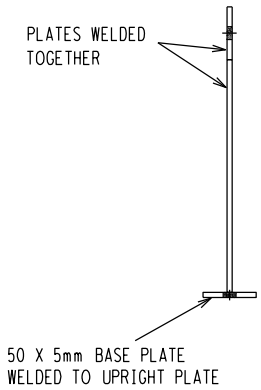

NOTES:

1. ALL WELDING AND WELDING SYMBOLS SHALL CONFORM TO SABS044 PART 1 TO 5.
2. ALL STRUCTURAL USE OF STEEL TO CONFORM TO SABS 0162. GRADE OF STEEL TO BE TO SABS 1431 GRADE 300WA.
3. ALL WELDS TO BE SEALED WELDED.
4. STEELWORK TO BE HOT DIP GALVANIZED TO SABS ISO 1461
5. ALL STEELWORK TO BE FABRICATED, ERECTED & LEVELED TO A TOLERANCE OF + - 1.5mm.
6. ALL BOLTS & NUTS TO CONFORM TO SABS 135, STRENGTH GRADE 4.8.
7. ALL MARKS TO BE STAMPED ONTO STEELWORK AND SHALL BE CLEARLY LEGIBLE AFTER GALVANIZING.
8. ALL HOLES TO BE ϕ14mm DIA UNLESS OTHERWISE STATED.
9. ALL BOLTS SECURING THE LABELS TO THE BRACKET MUST BE SUPPLIED BY THE CONTRACTOR
10. TWO ϕ10mm RAW BOLTS TO BE SUPPLIED BY THE CONTRACTOR

SECTION A-A

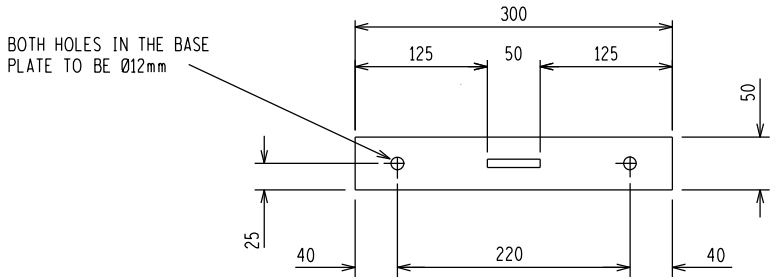

DRG NO.	REFERENCE DRAWINGS:

REV	REVISION DESCRIPTION	BY	CHKD	AUTH	DATE	
2	NOTES CHANGED TO DT STANDARD NOTES	CL	MG	NMW	22/04/2003	
1	NOTES CHANGED	VL	CL	NMW	26/09/2001	

Eskom Distribution

TRFR T-LABEL BRACKET

AUTH: N WEBBER
DATE: 18/06/2001
CHKD: C. LOTTERING
DATE: 07/02/2001
DRAWN: V LAWANA
DATE: 05/02/2001

SCALE 1:1

THIS DRAWING IS THE PROPERTY OF ESKOM

D-EC-1763

SET	SHEET	REVISION
	1	2

A3L