


1 2 3 4 5 6 7 8

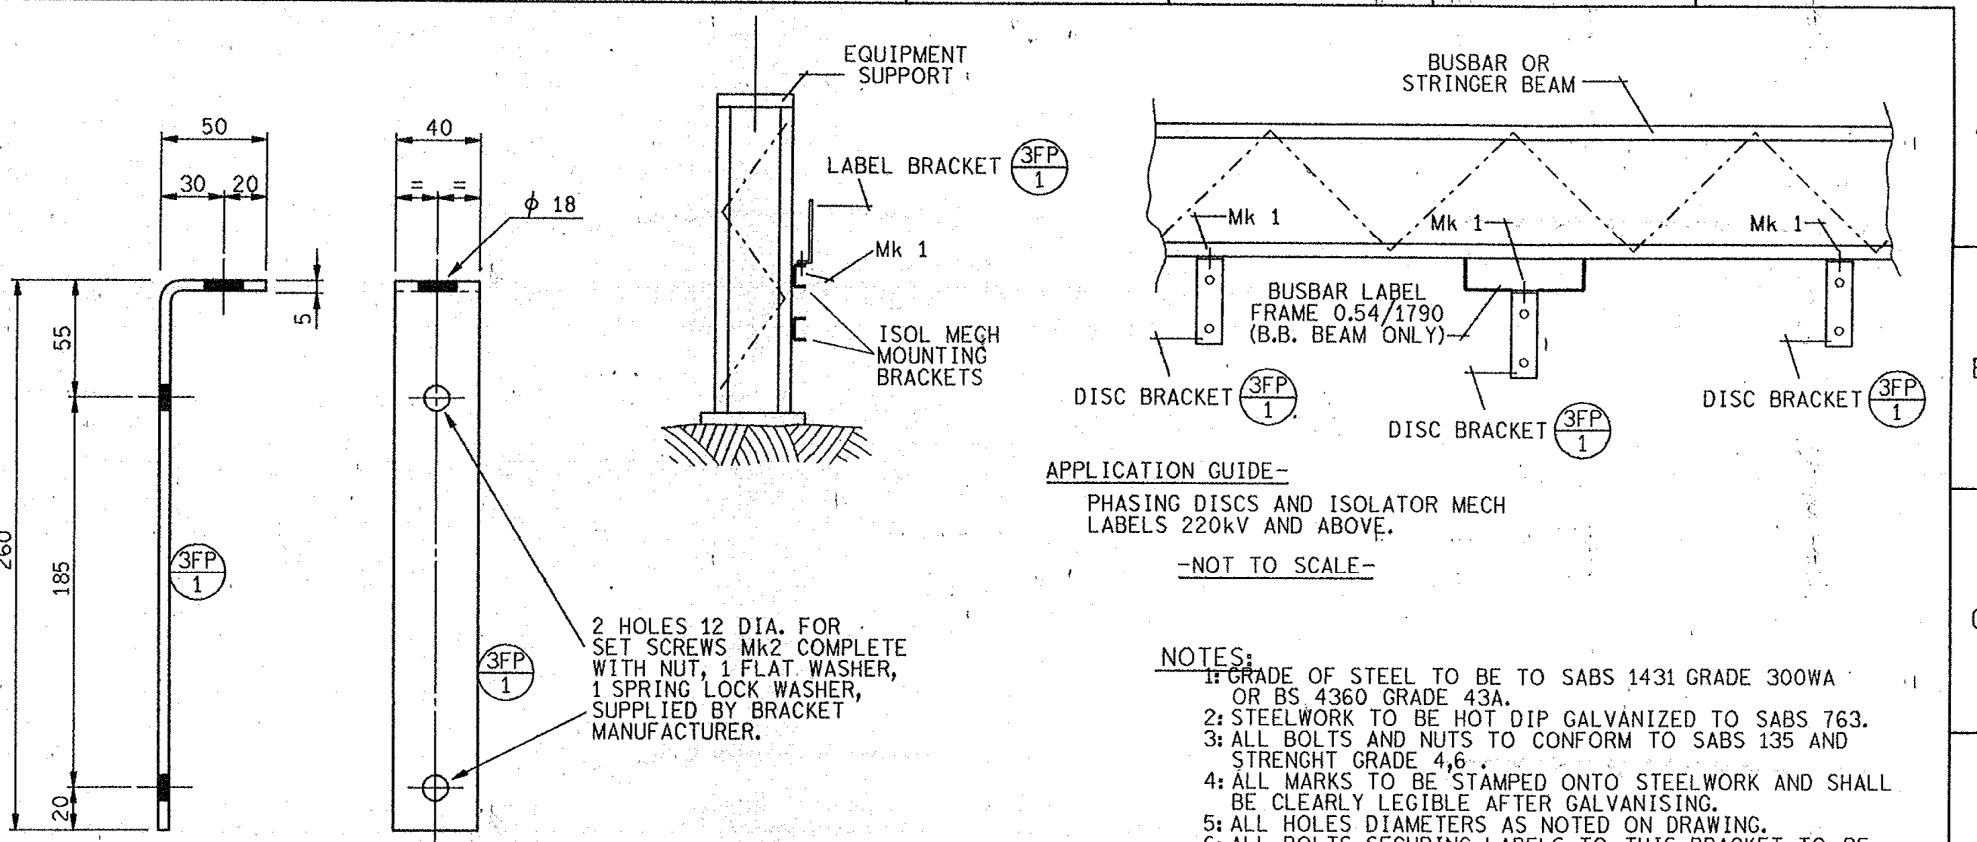

Mk 3FP 1  
40x5x302 lg  
MILD STEEL FLAT  
-SCALE 1:25-

BOLT SCHEDULE			
Mk	TYPE	No	OFF WASHER PER BOLT
1	M16x35	1	1 FLAT
2	M10x25 SET SCREWS	2	1 FLAT 1 SPRING LOCK

MASS		
BRACKETS	BOLTS	TOTAL
0,47 kg	0,23 kg	0,7 kg

PLOT SCALE- 25:1  
FILENAME- PHASEDSC.DGN

THIS DRAWING HAS BEEN CREATED  
ON A C.A.D. SYSTEM AND ANY  
AMENDMENT TO THE DRAWING  
MUST BE EFFECTED ONLY  
ON THE SAME C.A.D. SYSTEM

THE C.A.D. REFERENCE NUMBER IS:  
C100,164101794L000.R02

2	P.C.BRANT	6:8:92	REDRAWN TO NEW DIMENSIONS AND TITLE CHANGED.		P.C.BRANT
1	K. PEACOCKE	NOV. 1991	REDRAWN ON CAD - METRICATED AND TITLE CHANGED.	J.M.V.	P.F.A.B
0			FIRST ISSUE / EERSTE UITREIKING		404 LABELS
REV	AUTH MAG	DATE DATUM	REVISION/REVISIES	BY DEUR	CHKD NAGES
			INDEX REF/INDEXVERW	C3, S9	0.54/- REFERENCE DRAWINGS VERWYSINGSTEKENINGE
DRG.TEK REGISTR			TRANSMISSION SUBSTATION ENGINEERING	ELECTRICAL EQUIPMENT LABELS "L" MOUNTING BRACKET DETAIL	
			ESKOM		
CHKD NAGES	R.BANKS	SEPT. 1965	APPROVED	GOEDGEKEUR	
DRAWN GETEKEN	R.BANKS	JULY. 1965	F. KLOPPER	N. TROOST	
SCALE SKAAL	1 : 2,5		2:11:65	2:11:65	
					0.54/1794
					2

#### APPLICATION GUIDE-

PHASING DISCS AND ISOLATOR MECH  
LABELS 220kV AND ABOVE.

-NOT TO SCALE-

#### NOTES:

- 1: GRADE OF STEEL TO BE TO SABS 1431 GRADE 300WA  
OR BS 4360 GRADE 43A.
- 2: STEELWORK TO BE HOT DIP GALVANIZED TO SABS 763.
- 3: ALL BOLTS AND NUTS TO CONFORM TO SABS 135 AND  
STRENGTH GRADE 4,6.
- 4: ALL MARKS TO BE STAMPED ONTO STEELWORK AND SHALL  
BE CLEARLY LEGIBLE AFTER GALVANISING.
- 5: ALL HOLES DIAMETERS AS NOTED ON DRAWING.
- 6: ALL BOLTS SECURING LABELS TO THIS BRACKET TO BE  
SUPPLIED BY STEELWORK MANUFACTURER.