

## NOTES:

- MK
- $\frac{3Y}{1}$
- 4 OFF



MASS Kg		
STRUCTURE	BOLTS	TOTAL
117	3	120


## NOTES ON BOLTS:

- 1 - BOLTS TO BE SUPPLIED WITH ONE NUT AND ONE WASHER.
- 2- BOLTS ERECTED WITH HEAD TO INSIDE PREFERRED.
- 3- WASHER TO BE PLACED UNDER NUT.
- 4- ALL BOLTS TO BE GALVANIZED.

WAS 0.00/1988

2	L.E.R.	21.7.1987	METRICATED AND REDRAWN ON C.A.D.	Z.K.F.	R.J.C.	310	ADJ. CAP 'L1'
1	A.C.B.	19.11.82	METRIC SECTIONS ADDED.MASS REVISED.	R.J.C.	R.J.C.	311	ADJ. CAP 'L2'
Ø			FIRST ISSUE / EERSTE UITREIKING			312	FOUNDATION DETAILS
REV	AUTH MAG	DATE DATUM	REVISION/REVISES INDEX REF/INDEXSVIEW	BY DEUR	CHKD NAGES	0.54/	REFERENCE DRAWINGS VERWYSINGSTEKENINGE

ESKOM • EVKOM




THIS DRAWING HAS BEEN CREATED  
ON C.A.D. SYSTEM AND ANY  
AMENDMENT TO THE DRAWING  
MUST BE EFFECTED ONLY  
ON THE SAME C.A.D. SYSTEM

THE C.A.D. REFERENCE NUMBER IS:  
QSA1:[100,164]00309 L000.R02

DRAWN GETEKEN	M.J.H.	11.4. 1967	APPROVED P.BATTISON	GOEDGEKEUR LAING		0.54/309	REV 2
				12.4.67	12.4.67		
SCALE SKAAL	1 : 20		12.4.67	12.4.67			



# EARTHING HOLE

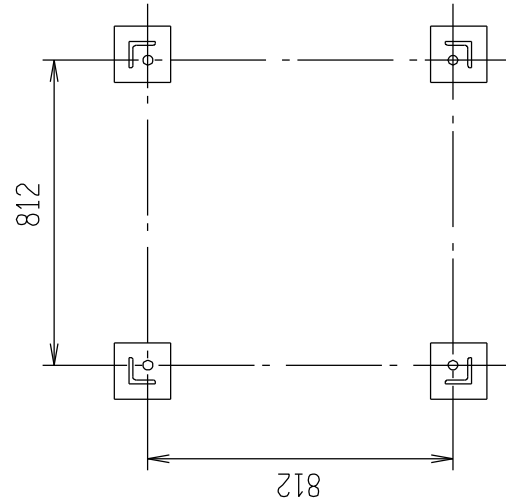

# PLAN ON BASE