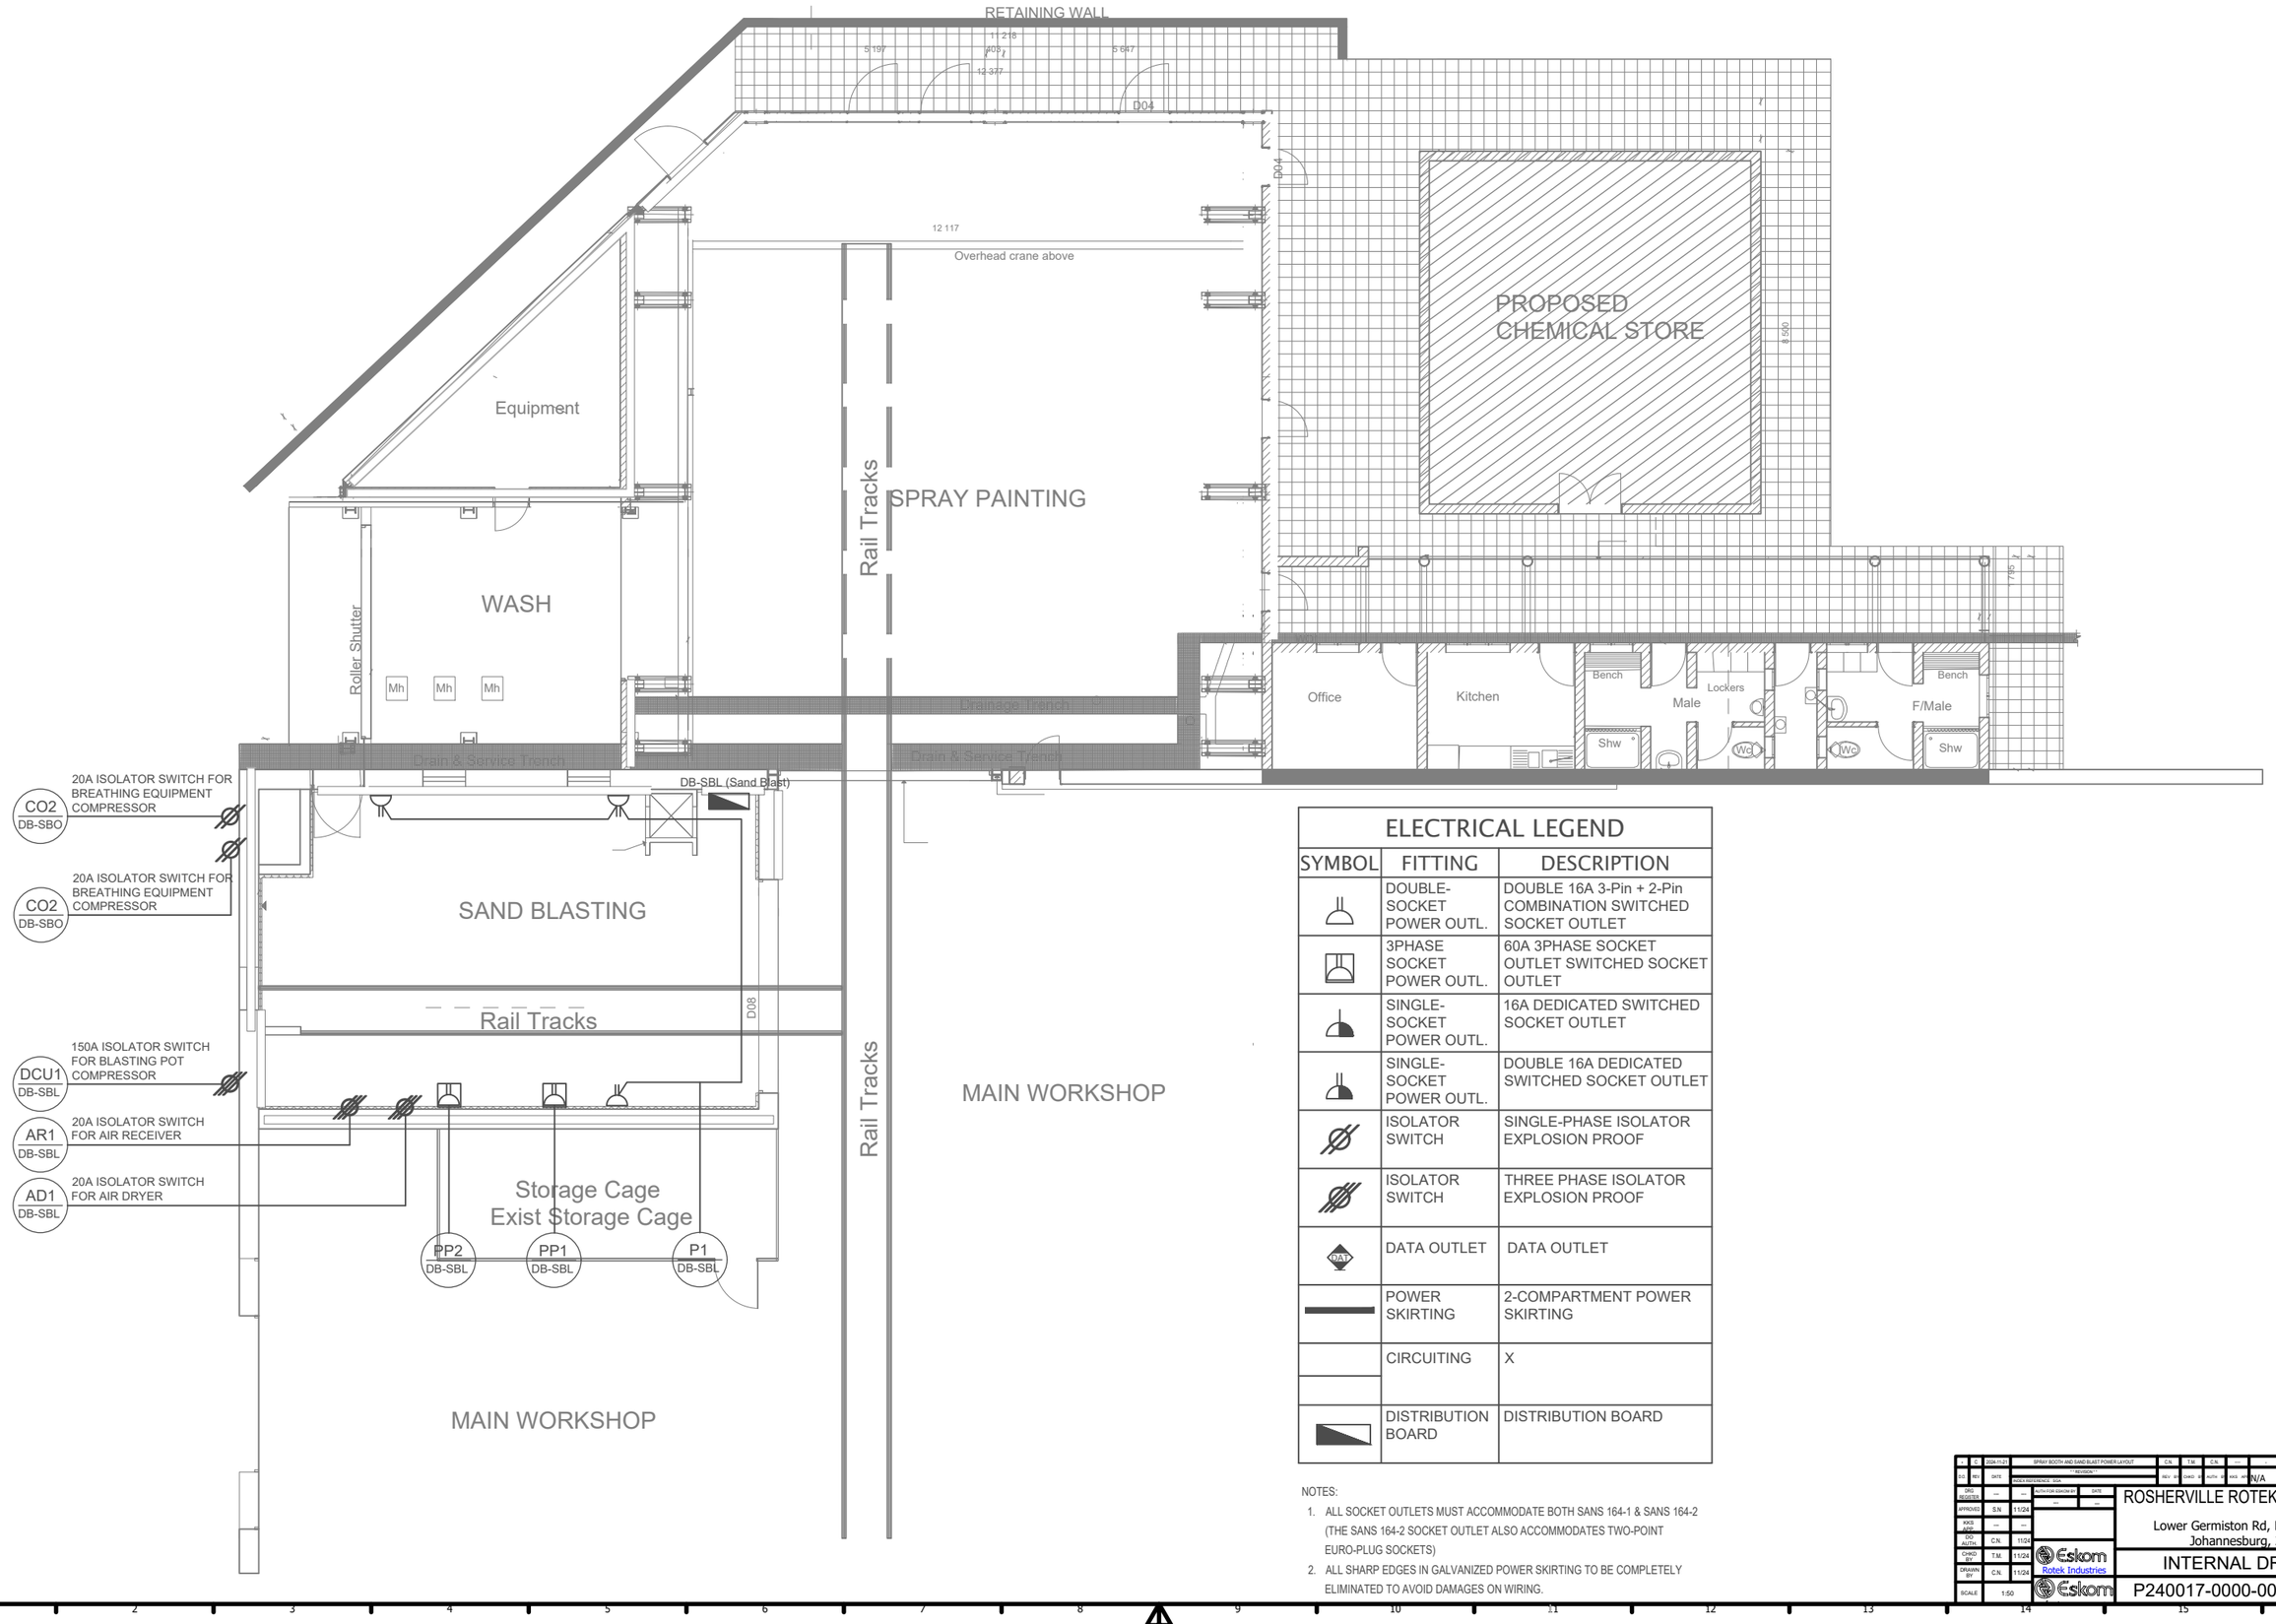

ELECTRICAL LEGEND

SYMBOL	FITTING	DESCRIPTION
	DOUBLE-SOCKET POWER OUTL.	DOUBLE 16A 3-Pin + 2-Pin COMBINATION SWITCHED SOCKET OUTLET
	3PHASE SOCKET POWER OUTL.	60A 3PHASE SOCKET OUTLET SWITCHED SOCKET OUTLET
	SINGLE-SOCKET POWER OUTL.	16A DEDICATED SWITCHED SOCKET OUTLET
	SINGLE-SOCKET POWER OUTL.	DOUBLE 16A DEDICATED SWITCHED SOCKET OUTLET
	ISOLATOR SWITCH	SINGLE-PHASE ISOLATOR EXPLOSION PROOF
	ISOLATOR SWITCH	THREE PHASE ISOLATOR EXPLOSION PROOF
DAT	DATA OUTLET	DATA OUTLET
	POWER SKIRTING	2-COMPARTMENT POWER SKIRTING
	CIRCUITING	X
	DISTRIBUTION BOARD	DISTRIBUTION BOARD

NOTES:

1. ALL SOCKET OUTLETS MUST ACCOMMODATE BOTH SANS 164-1 & SANS 164-2 (THE SANS 164-2 SOCKET OUTLET ALSO ACCOMMODATES TWO-POINT EURO-PLUG SOCKETS)
2. ALL SHARP EDGES IN GALVANIZED POWER SKIRTING TO BE COMPLETELY ELIMINATED TO AVOID DAMAGES ON WIRING.

-	C	2024-11-21	SPRAY BOOTH AND SAND BLAST POWER LAYOUT	C.N.	T.M.	C.N.	---	-
E.O.	REV.	DATE	REVISION	REV. BY	CHKD. BY	AUTH. BY	AKS. APP.	REFERENCE DRAWINGS N/A

DRG REGISTER	---	---
APPROVED	S.N.	11/24
AKS APP.	---	---
DO AUTH.	C.N.	11/24
CHKD BY	T.M.	11/24
DRAWN BY	C.N.	11/24
SCALE	1:50	

AUTH FOR ESKOM BY: --- DATE: ---

Eskom Rotek Industries

ROSHERVILLE ROTEK INDUSTRIES

Lower Germiston Rd, Rosherville, Johannesburg, 2094

INTERNAL DRG No.

P240017-0000-003

SIZE: - SHEET: 1/1 REV: C

Size A0