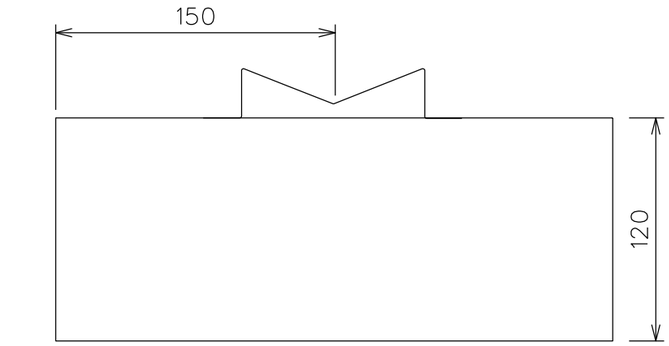

TOP VIEW

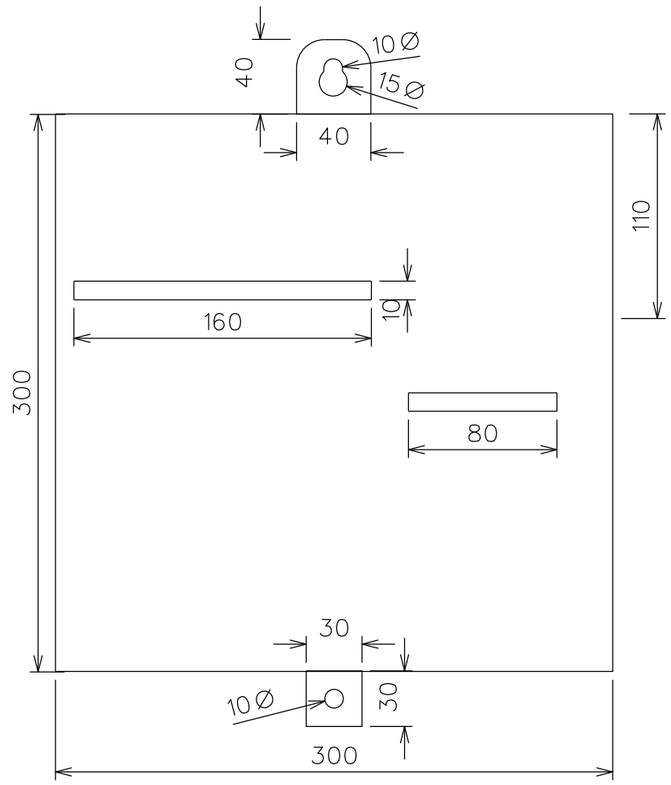

FRONT VIEW

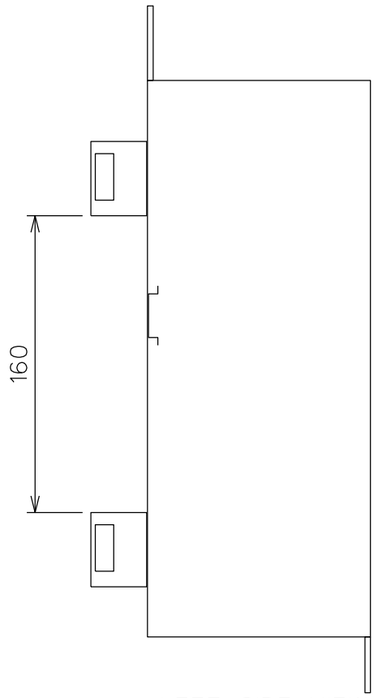

LEFT SIDE VIEW

NOTES:

1. THE MINIMUM DIMENSIONS OF THE KIOSK ARE SHOWN IN THE DRAWINGS.
2. THE DOOR SHALL BE HINGED AT THE TOP BY AT LEAST TWO HINGES.
3. THE DOOR AND KIOSK SHALL PROVIDE A LIP AND HOLE WHEREBY THE KIOSK CAN BE LOCKED BY A STANDARD ESKOM LOCK.
4. AT LEAST ONE CAPTIVE SCREW OR OTHER MECHANICAL LOCKING MECHANISM SHALL ALSO BE PROVIDED TO CLOSE THE DOOR.
5. A DOOR STAY SHALL BE PROVIDED WHERYBY THE DOOR CAN BE KEPT OPEN AT A 90 DEGREE ANGLE.
6. THE KIOSK SHALL HAVE AN IP RATING OF 43.
7. A 160mm WIDE DIN-RAIL SHALL BE FITTED TO THE BACK OF THE KIOSK FOR THE FITMENT OF THE EQUIPMENT.
8. TWO MOUNTING BRAKETS FOR 20MM WIDE STAINLESS STEEL STRAPPING SHALL BE FITTED AT THE BACK OF THE KIOSK.
9. A LIFTING LUG SHALL ALSO BE PROVIDED AS INDICATED.
10. 80mm WIDE DIN-RAIL SHALL BE FITTED IN THE KIOSK FOR THE FITMENT OF MCBs

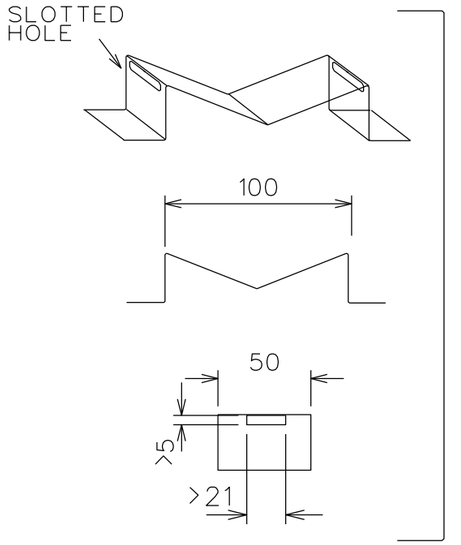

DETAILS OF MOUNTING BRACKET

3rd ANGLE

REV	REVISION DESCRIPTION	BY	CHKD	AUTH	DATE	PROJECT NO.

Eskom

METER KIOSK
POLE TOP 2 WAY
MANUFACTURING DETAIL:
KIOSK

AUTH:
DATE:
CHKD:
DATE:
DRAWN: J.SHINTA
DATE: 21/07/2025

D-DT-1049

SET	SHEET	REVISION
3	1	A

SIZE GROOTTE A3L