



EARTHING OF SURGE ARRESTER  
MOUNTED ON INSULATED BASE  
WITH PROVISION FOR CONDITION  
MONITORING DEVICE.


(SEE ALSO SHT T14 & 14A)

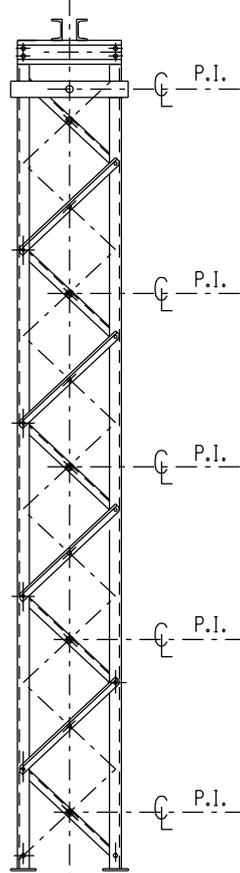


0.54/1596  
5000 HIGH  
MED. SUPPORT  
(5 INSULATORS)

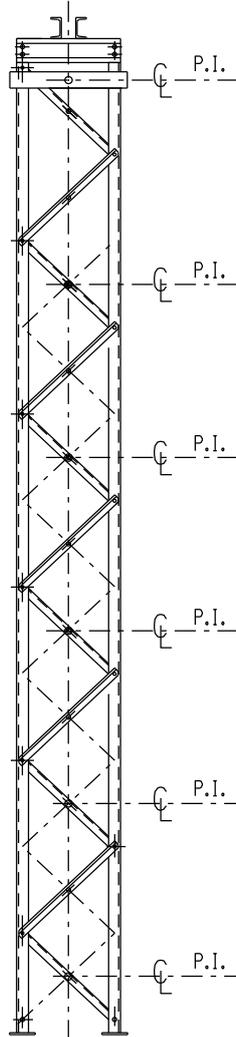

0.54/4160  
6000 HIGH SUPPORT  
(SA MTD ON FIRE  
BARRIER SUPPORT)  
(6 INSULATORS)

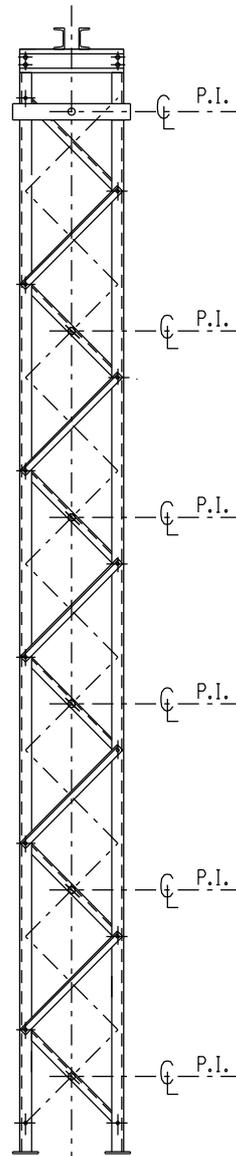

0.54/4586  
6500 HIGH SUPPORT  
(6 INSULATORS)

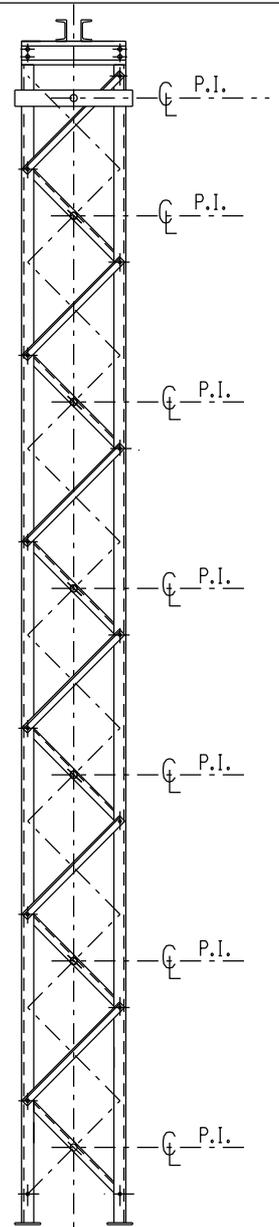

0.54/4318  
7000 HIGH SUPPORT  
(7 INSULATORS)

0		E.G.	P.C.B.	I.HILL	25/05/07		
REV	REVISION DESCRIPTION	BY	CHKD	AUTH	DATE	REFERENCE DRAWINGS	
APPROVED BY				ESKOM HOLDINGS LIMITED REG NO. 2002/015527/06			
I.HILL							
DATE	25/05/07						
CHECKED BY	EARTHING STANDARDS  ©						
P.C.B.							
DATE							25/05/07
DRAWN BY							E.G.
DATE	MARCH 2007	0.54/393			SHEET NUMBER	REVISION	
SCALE: N.T.S.					T14B	0	