


SCHEDULE OF LUMINAIRES WITH LAMPS

PLAN REF	DESCRIPTION	SUPPLIERS	CAT No
A	HIGH PERFORMANCE LED LUMINAIRE. COPPER FREE ALUMINIUM HOUSING, WITH EPOXY COATED POWDER COATING GREY. CONSTANT CURRENT LED DRIVER	NORLAND LIGHTING	BLD150-60
B	BULKHEAD LED LUMINAIRE. COLOUR INDEX 4000K. BODY: HIGH PRESSURE DIE CAST ALUMINIUM. CONTROL GEAR: CONSTANT CURRENT LED DRIVER	NORLAND LIGHTING	NML 16LED-AREA

NOTES:

1. ELECTRICAL INSTALLATION-
1.1. SHALL BE IN ACCORDANCE WITH:
SANS 10142
- 1.2. INCOMING CABLE TO BE PROTECTED WITH 25 DIA GALVANISED PIPE,
ON SPACER BAR SADDLES
- 1.3. OUTDOOR SWITCHES TYPE AQUARIUS FROM WACO OR EQUAL
1.3.1. DP16A 250V AC, IP65 2 SIDE ENTRIES
1.3.2. SP16A 250V AC, IP65 2 SIDE ENTRIES
- 1.4. CABLE: BVX3CCV & BVX4CCV ON SPACER BAR SADDLES
- 1.5. CABLE BOXES: 3 WAYS WITH CABLE GLANDS FROM PRATLEY OR EQUAL

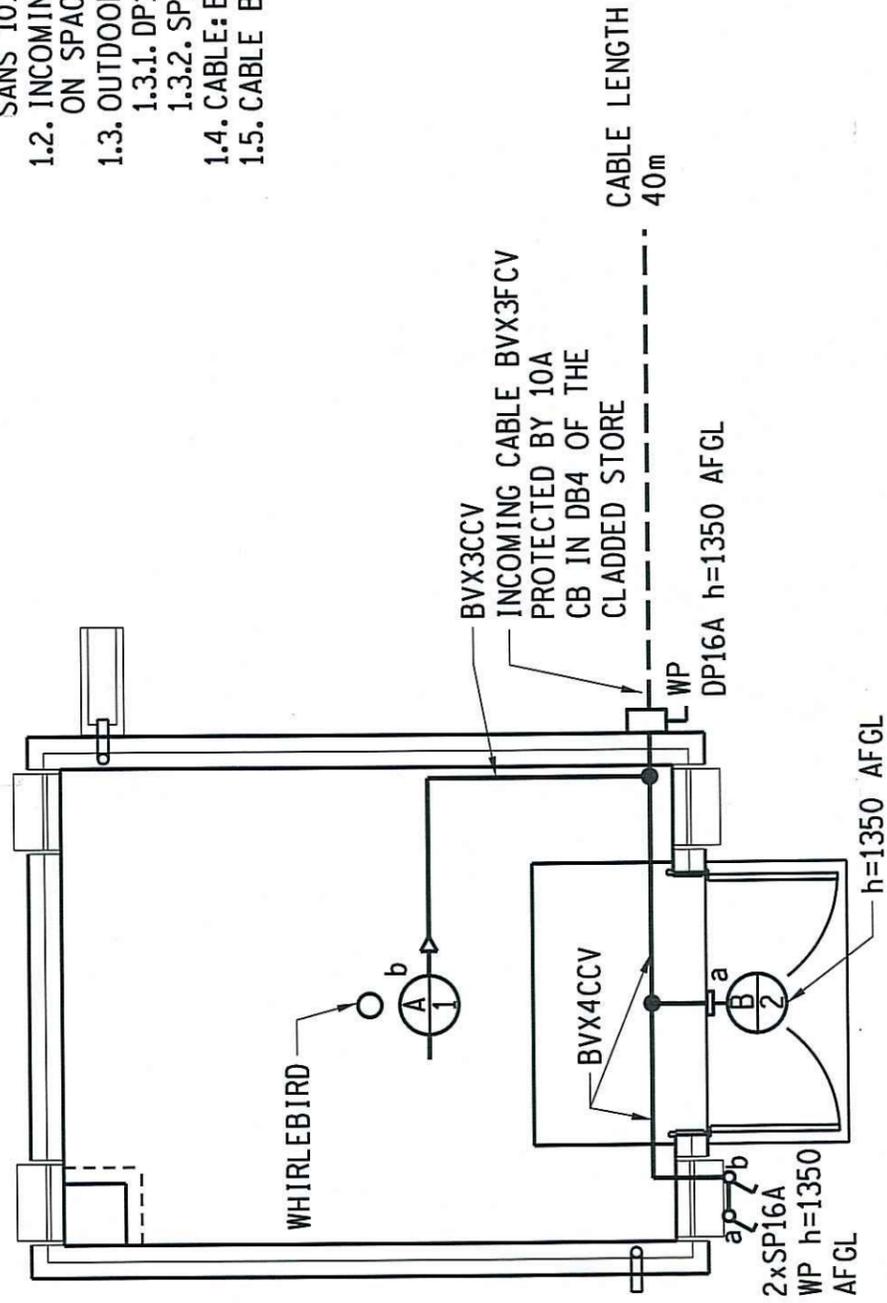

REV	REVISION DESCRIPTION	BY	CHKD	DATE	REFERENCE DRAWINGS
APPROVED BY	Eskom Holdings SOC Ltd Reg No 2002/015527/30				
DATE 18/9/2017					
CHECKED BY	WESKUSFLEUR CONSUMABLE STORE ELECTRICAL INSTALLATION LAYOUT				
DATE 18/9/2017					
DRAWN BY	©				
DATE 18/9/2017					
SCALE	WKoe11P01-SE-D63				
SHEET NUMBER					REVISION
0					0