


SECTION 'A'-A'

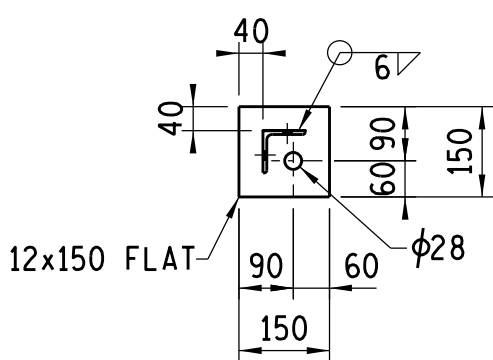


SECTION 'B'-B'
1:10

BOLT SCHEDULE (STRENGTH GRADE 8.8)				
MK	DIA	LENGTH	No OFF	WASHER/BOLT
1	M 16	35	8	1 FLAT
2	M 16	40	8	1 FLAT

NOTES ON BOLTS:
 1- BOLTS TO BE SUPPLIED WITH ONE NUT AND WASHER.
 2- BOLTS ERECTED WITH HEAD TO INSIDE PREFERRED.
 3- WASHER TO BE PLACED UNDER NUT.
 4- ALL BOLTS TO BE GALVANIZED.

MASS IN kg		
STRUCTURE	BOLTS	TOTAL
88	2	90

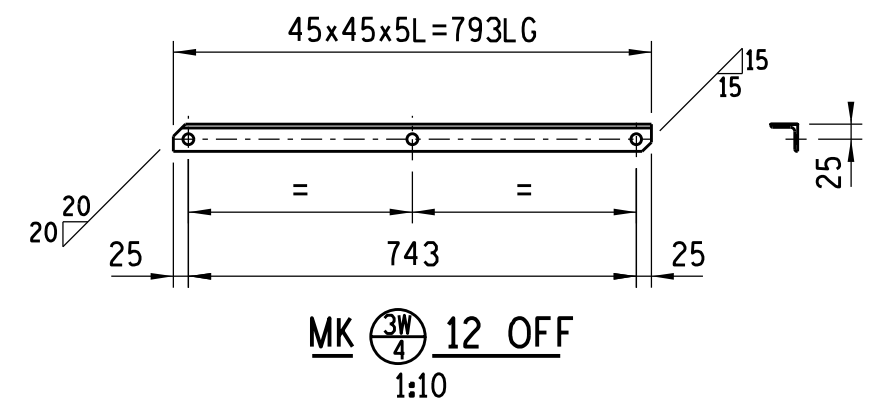

NOTES

- ALL WELDING AND WELDING SYMBOLS SHALL CONFORM TO SABS 10044 PART 1 TO PART 5.
- ALL STEELWORK TO BE GRADE S355JR, TO SANS 1431 AND HOT DIP GALVANISED TO SANS 121.
- ALL WELDS TO BE SEAM WELDED.
- ALL STEELWORK TO BE FABRICATED, ERECTED & LEVELLED, TO A TOLERANCE OF + OR - 1,5 mm.
- ALL BOLTS SECURING EQUIPMENT TO THIS STRUCTURE, TO BE SUPPLIED BY EQUIPMENT CONTRACTOR.
- H.D. BOLTS COMPLETE WITH NUT AND WASHER TO BE SUPPLIED BY CIVIL CONTRACTOR.
- HOLES TO BE DIA.18 FOR M16 GRADE 8.8 BOLTS HOT DIP GALVANIZED, UNLESS OTHERWISE STATED.
- ALL MARKS TO BE STAMPED ONTO STEELWORK AND SHALL BE CLEARLY LEGIBLE AFTER GALVANISING.
- ALL WORK SHALL COMPLY WITH SANS 1200 SERIES SPECIFICATIONS. SPECIFICATIONS: TOLERANCE/DEVIATION TO BE DEGREE OF ACCURACY II

3		UPDATED TO STANDARD		A.T.	22 - 04 - 2021	4358	FOUNDATION
REV		REVISION DESCRIPTION		DRAWN	CHKD	306/307	ADJUSTABLE/TOP CAP
APPROVED BY		DATE 31/08/73		DATE 31/03/1973		308	FOUNDATION
P.PEARCE		P.J.G		P.C.B		0.54/	
DATE 31/08/73		DATE 31/03/1973		DATE 27/07/1973		REFERENCE DRAWINGS	
P.PEARCE		P.J.G		P.C.B		0.54/301	
DATE 31/08/73		DATE 31/03/1973		DATE 27/07/1973		SHEET NUMBER	
P.PEARCE		P.J.G		P.C.B		0	
DATE 31/08/73		DATE 31/03/1973		DATE 27/07/1973		REVISION	
P.PEARCE		P.J.G		P.C.B		3	
DATE 31/08/73		DATE 31/03/1973		DATE 27/07/1973		SCALE 1:25	
P.PEARCE		P.J.G		P.C.B		0.54/301	
DATE 31/08/73		DATE 31/03/1973		DATE 27/07/1973		SHEET NUMBER	
P.PEARCE		P.J.G		P.C.B		0	
DATE 31/08/73		DATE 31/03/1973		DATE 27/07/1973		REVISION	
P.PEARCE		P.J.G		P.C.B		3	