


A  
B  
C  
D  
E  
F  
G  
H

SANITARYWARE SPECIFICATION				
DESCRIPTION OF ITEM				
	MALE	FEMALE	OFFICE	
WASH BASIN	2	2		VAAL POTTERIES VITREOUS CHINA 560x405mm FLAMINGO 7007 WHITE BASIN WITH ONE TAPHOLE CONFIGURATION, COMPLETE WITH WASTE, GRID, PLUG AND CHAIN. SUPPORTED ON A VAAL FULL UNIVERSAL FLOOR MOUNTED PEDESTAL.  ONE COBRA 'STELLA' BASIN MIXER - HOT & COLD  40 x 32mm 'COBRA' (350) CP BOTTLE TRAP WITH 75mm SEAL, INLET SCREWED FEMALE, OUTLET MALE.  'COBRA' (232/350) 15mm CP ANGLE REGULATING VALVE WITH 350mm LONG SUPPLY TUBE AND CAPNUT.  400 x 600 x 6mm MIRROR WITH POLISHED EDGES, PLUGGED TO WALL WITH CP CAPPED SCREWS.  (MIRROR TO BE FITTED ABOVE WASH BASIN SEE DETAIL) 450mm LONG x 19mm dia. CP TOWEL RAIL TO BE FITTED ON WALL NEXT TO BASIN.
W.C.	1	1		'VAAL POTTERIES WHITE VITREOUS CHINA CLOSE COUPLED PAN DAISY 751453 COMPLETE WITH MATCHING 9 LITRE INLET CISTERN, LID, FLUSH PIPE, HANDLE AND SEAT.  150 x 150mm 'COBRA' SEMI-RECESSED WHITE VITREOUS CHINA TOILET ROLL HOLDER. (POSITION TO BE DETERMINED ON SITE)
SINK FLOOR UNIT	1		1	CITIMETAL STAINLESS STEEL ECONOMY TYPE GRADE 430 PREPARATION BOWL COMPLETE WITH 40mm dia. RUBBER TRAP, WASTE GRID, PLUG AND CHAIN.  1 OFF 'COBRA' CARINA SINK MIXER ONE HOLE WITH OVERARM SWIVEL OUTLET AND MOUNTING KIT. FSK 2D1CA-OGT01
W.C.	1	1		'VAAL POTTERIES WHITE VITREOUS CHINA CLOSE COUPLED PAN 'PEARL PARAPLEGIC' 7300 SC COMPLETE WITH MATCHING 9 LITRE INLET CISTERN, LID, PURPOSE MADE C.P SIDE-FLUSH LEVERPIPE, HANDLE AND SEAT.  150 x 150mm 'COBRA' SEMI-RECESSED WHITE VITREOUS CHINA TOILET ROLL HOLDER. (POSITION TO BE DETERMINED ON SITE)  DORMA - DGR-SS-150 CICTERN BACK RAIL AROUND TOILET AT 800mm HEIGHT  VAAL PARAPLEGIC TOILET AS SPECIFIED  FRANKE OR SIMILAR ANGLED GRAB BAR STAINLESS STEEL BOTTOM PART AT 800mm

SANITARYWARE SPECIFICATION				
DESCRIPTION OF ITEM				
	MALE	FEMALE	OFFICE	
SHOWER	2	2		'COBRA' VANDALMASTER (KP2.65) VANDAL RESISTANT METERING SHOWERHEAD, CP, WITH SELF CLEANING NOZZLE AND FLOW CONTROLLER.  1 PAIR 15mm UNDERWALL STAR STOPTAPS (138), CP, COPPER TO COPPER, 'CONEX' COMPRESSION RING TYPE. (STAR TYPE HANDLES)  38mm SHOWER 'P' TRAP (373), SHALLOW SEAL, WITH CP, GRATING, OUTLET SCREWED FEMALE IRON.  150 x 150mm 'COBRA' SEMI-RECESSED WHITE VITREOUS CHINA SINGLE SOAP DISH (POSITION TO BE DETERMINED ON SITE)  1000 x 1800 ALUMINIUM PIVOT DOOR TO FIT OPENING. OPEN OUTWARDS AGAINST WALL. FULL LENGTH WATERTIGHT MAGNETIC DOOR SEAL KNOB HANDLE BOTH SIDES OF GLASS  450mm LONG x 19mm dia. CP TOWEL RAIL. FIXED ON WALL OPPOSITE DOOR ENTRANCE AT SEAT - 1,2m HIGH  FIT TWO 70x150 C.P COAT HOOKS ABOVE SHOWER SEAT  FLOOR OF SHOWER TO FALL TO OUTLET AND TO BE COVERED WITH MOSAIC TILES ON WATERPROOF CEMENTITIOUS ADHESIVE AND GROUT  FRONT OF SHOWER FLOOR AT CURTAIN TO BE RAISED 150mm AND TO BE TILED WITH FLOOR TILES  INSTALL FOLD-UP SHOWER SEAT WHERE SHOWN ON PLAN 480 x 460 BY 'RAILMAN GRABRAILS) REF. XS' 011 624 1222 OR SIMILAR APPROVED
URINAL	1	1		VAAL - LAVATERA URINAL WALL HUNG WHITE COMPLETE WITH TOP ONLET FITTINGS, OUTLET AND BOTTLE CHROME PLATED TRAP

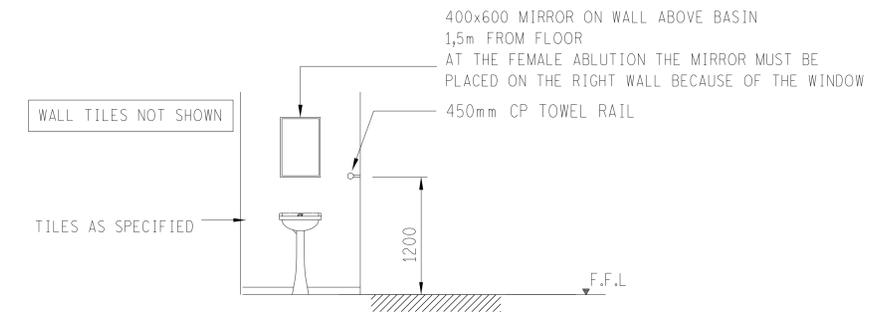

MIRROR & TOWEL RAIL ARRANGEMENT AT BASIN - FEMALE

1:50

PLUMBING NOTES

ALL PLUMBING SHALL BE COPPER USED WITH THE CAPILLARY SOLDER SYSTEM AND TO CONFORM TO TO SANS 460. TUBING UNDERGROUND SHALL BE CLASS 3 TUBING ABOVE GROUND SHALL BE CLASS 0 NO BENDING ALLOWED AND FITTINGS TO BE USED ALL PIPES TO PASS A 1 HOUR PRESSURE TEST AT 1 1/2 X PRESSURE. PRESSURE RELEASE VALVE AT GEYSER TO BE ISOLATED. NO PERSON SHALL PERFORM THE TRADE OF PLUMBING IF HE/SHE IS NOT A REGISTERED LICENCED PLUMBER WITH THE PLUMBING INDUSTRY REGISTRATION BOARD. A CERTIFICATE OF COMPLIANCE MUST BE ISSUED AFTER THE COMPLETION OF THE WORK.

**FINAL DESIGN FOR CONSTRUCTION**

REV	REVISION DESCRIPTION	DRAWN	CHKD	AUTH	DATE	REFERENCE DRAWINGS
APPROVED BY	Eskom		Eskom Holdings SOC Ltd Reg No 2002/015527/30			
DATE	9-1-2023	SUBSTATION STANDARDS				
CHECKED BY	CONTROL BUILDING FINISHES SCHEDULE - SANITARY WARE					
DATE	9-1-2023	SHEET NUMBER				
DRAWN BY	D. NAUDE					REVISION
DATE	1-1-2023	0.54/1150				
SCALE	AS SHOWN	105 0				