



PLAN

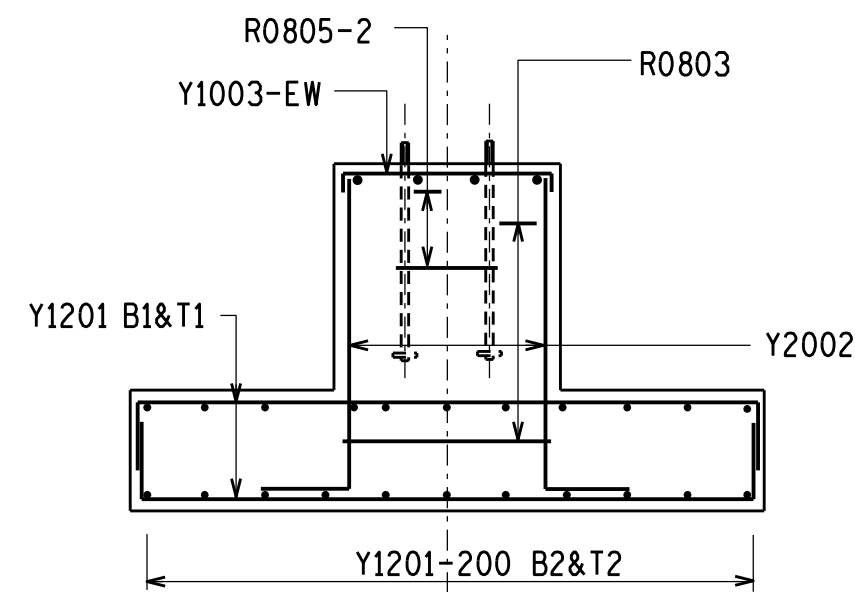

DETAIL 1

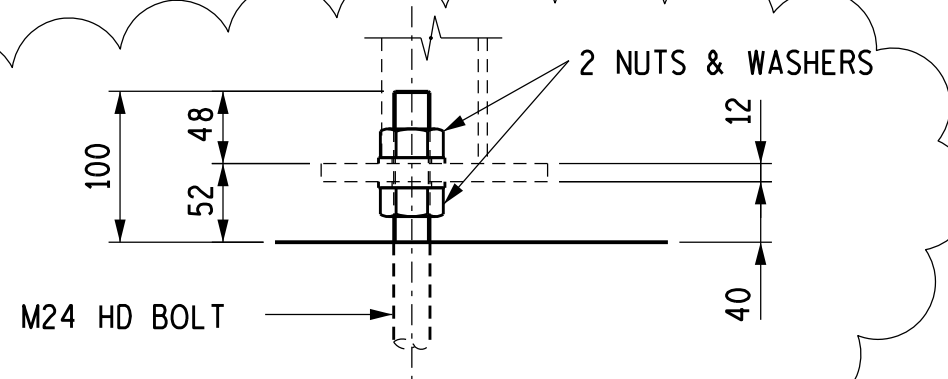

PLOT SCALE: 250

THE C.A.D. REFERENCE NUMBER IS:

$$C = (B/300) + 1$$

1. CONCRETE STRENGTH AT 28 DAYS/STONE SIZE:BLINDING = 15/19
FOUNDATIONS = 25/19
2. MIN. CONCRETE COVER TO REINFORCEMENT = 50 mm.
3. a.) H.D.BOLTS SUPPLIED BY CIVIL CONTRACTOR COMPLETE WITH NUTS AND WASHERS TO BE HOT DIPPED GALVANISED TO SABS 763
b.) THREADS OF NUTS TO BE OVER-CUT TO SABS 763 TO ALLOW FOR THICKNESS OF GALVANISING
4. FORMWORK TO EXTEND AT LEAST 150mm BELOW GROUND LEVEL.
5. ALL WELDING AND WELDING SYMDOLS TO S.A.B.S. 044
6. STEEL TEMPLATE TO BE USED FOR SETTING H.D.BOLTS
7. ALL TOP EDGES OF CONCRETE TO HAVE 20x20 CHAMFERS
8. ALL WORK TO BE IN ACCORDANCE WITH SABS 1200 SERIES SPECIFICATION
9. CONCRETE FINISH : TOP OF FOUNDATION - WOOD FLOAT FINISH
: SIDES - SMOOTH OFF SHUTTER FINISH

SIZE A2L